**10/070795**

## TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

### (ENTRY INTO U.S. NATIONAL PHASE UNDER CHAPTER II)

| | | |
|---|---|---|
| International Application No. | : | PCT/EP00/06078 |
| International Filing Date | : | June 29, 2000 |
| Priority Date Claimed | : | German Application No. 199 46 669.6 Filed September 29, 1999 |
| Title of Invention | : | METHOD FOR ADJUSTING A PHASE ANGLE OF A PHASE MODIFIER OF A TRANSMITTING DEVICE |
| Applicant | : | Friedrich LIPP Elsenwang 112 A-5322 Hof bei Salzburg Austria |

Box PCT     (EO/US)
Commissioner for Patents
Washington, D.C.  20231

Sir:

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1.  This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.

2.  This express request to immediately begin national examination procedures (35 U.S.C. 371(f)).

3. A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

4. The International Application as filed (35 U.S.C 371(c)(2)) has been transmitted by the International Bureau. A copy of the cover sheet of the international application as published on April 5, 2001, under International Publication No. WO 01/24467 is enclosed.

5. A translation of the international application is enclosed.

6. A Preliminary Amendment and an Abstract of the Disclosure are enclosed.

7. An Information Disclosure Statement, PTO Form 1449 and copies of each of the references disclosed therein are enclosed.

8. Calculation sheet, in duplicate, is attached.

9. A Declaration is enclosed.

10. An Assignment is enclosed, together with a Recordation Cover Sheet
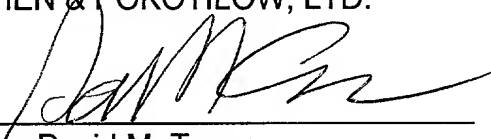
11. An Application Data Sheet is enclosed.

This application and items attached are being transmitted before the 30 month claimed priority date.

Respectfully submitted,

CAESAR, RIVISE, BERNSTEIN,
COHEN & POKOTILOW, LTD.

March ___, 2002

By_____
David M. Tener
Reg. No. 37,054
12th Floor, Seven Penn Center
1635 Market Street
Philadelphia, PA 19103-2212
Attorneys for Applicant
Tel. No. 215-567-2010

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT EXAMINING OPERATION

Applicant(s):    Friedrich LIPP

Serial No:                      Group Art Unit:

Filed:                          Examiner:

Att. Docket No.: M1211/20001    Confirmation No.:

For: METHOD FOR ADJUSTING A PHASE ANGLE OF A PHASE MODIFIER
     OF A TRANSMITTING DEVICE

## PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, DC 20231

Sir:

Prior to initial examination on the merits, please amend the above-identified application as follows:

IN THE SPECIFICATION:

Page 1, above line 4 and below the title, please insert the following centered heading:

-- BACKGROUND OF THE INVENTION --.

Please replace the paragraph at page 1, lines 10-31, with the following rewritten paragraph:

-- EP 0 706 259 A1 discloses a transmitting device wherein a basic band input signal is supplied to a quadrature modulator via two differential amplifiers. Said quadrature modulator performs quadrature modulation of the inphase component and the quadrature phase component of the complex input signal. Power amplification takes place in a power amplifier connected downstream the quadrature modulator. To compensate the non-linerarity of this power amplifier a feedback loop is provided, generally designated as a Cartesian feedback. In this feedback loop is located a quadrature demodulator

which separates the fedback signal into a fedback inphase component and a fedback quadrature phase component. The fedback inphase component is supplied, together with the inphase component of the input signal, to a first differential amplifier, connected upstream the quadrature modulator. Correspondingly, the fedback quadrature phase component is supplied, together with the quadrature phase component of the input signal, to a second differential amplifier. In this way the non-linearities of the power amplifier are compensated via the fedback signal. --.

Page 2, line 31, please insert the following centered heading:

-- SUMMARY OF THE INVENTION --.

Please delete the paragraphs at page 3, lines 6-7 and lines 20-21.

Page 5, line 13, please insert the following centered heading:

-- BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS --.

Page 5, line 27, please insert the following centered heading:

-- DETAILED DESCRIPTION OF THE INVENTION --.

IN THE CLAIMS:

Please cancel claims 1-9 without prejudice or disclaimer.

Please add claims 10-28 as follow:

-- 10. A method for adjusting a phase angle of a phase modifier of a transmitting device, wherein said method comprises:

providing the transmitting device comprising:

a quadrature modulator for quadrature modulation of an inphase component and a quadrature phase component of a complex input signal;

a power amplifier, connected downstream of the quadrature modulator;

a quadrature demodulator for quadrature demodulation of an output signal of the power amplifier into a fedback inphase component and a fedback quadrature phase component;

a first differential amplifier, connected upstream the quadrature modulator, said first differential amplifier having a first input supplied by the inphase component of the input signal and a second input supplied by the fedback inphase component;

a second differential amplifier, connected upstream the quadrature modulator, said second differential amplifier having a first input of the second differential amplifier supplied by the quadrature phase component of the input signal and a second input of the second differential amplifier supplied by the fedback quadrature phase component; and

a phase modifier, which supplies to the quadrature demodulator an oscillator signal, shifted with regard to an oscillator signal supplied to the quadrature modulator by the phase angle to be adjusted;

applying an input signal with a predetermined constant inphase component and a predetermined constant quadrature phase component at each transmitting interval with a closed feedback loop containing the quadrature modulator, the power amplifier, the quadrature demodulator, the first differential amplifier and the second differential amplifier;

measuring the quadrature phase component and/or the inphase component at a first measuring point behind an output of the first differential amplifier and a second measuring point behind an output

3

of the second differential amplifier;

determining a phase correction value based on the measured quadrature phase component and/or the measured inphase component; and

correcting the currently set phase angle of the phase modifier by adding or subtracting the determined phase correction value in a transmitting interruption interval.

11. The method according to claim 10, wherein the quadrature phase component of the input signal being applied has a value of zero, and the measuring at the second measuring point behind the output of the second differential amplifier takes place at a beginning of every transmitting interval.

12. The method according to claim 11, wherein the inphase component is measured at the first measuring point behind the output of the first differential amplifier.

13. The method according to claim 10, wherein the phase correction value ($\Delta\varphi$) is determined by solving the following equation:

$$\Delta\varphi = \text{arc tan } (V_{QM}/V_{IM}) - \text{arc tan } (Q/I)$$

wherein $V_{QM}$ is the measured quadrature phase component, $V_{IM}$ is the measured inphase component, $Q$ is the predetermined quadrature phase component and $I$ is the predetermined inphase component.

14. The method according to claim 11, wherein the phase correction value ($\Delta\varphi$) is determined by solving the following equation:

$$\Delta\varphi = \text{arc tan } (V_{QM}/V_{IM}) - \text{arc tan } (Q/I)$$

wherein $V_{QM}$ is the measured quadrature phase component, $V_{IM}$ is the measured inphase component, $Q$ is the predetermined quadrature phase component and $I$ is the predetermined inphase component.

15. The method according to claim 12, wherein the phase correction value ($\Delta\varphi$) is determined by solving the following equation:

$$\Delta\varphi = \arctan(V_{QM}/V_{IM}) - \arctan(Q/I)$$

wherein $V_{QM}$ is the measured quadrature phase component, $V_{IM}$ is the measured inphase component, $Q$ is the predetermined quadrature phase component and $I$ is the predetermined inphase component.

16. The method according to claim 11, wherein the determining of the phase correction value comprises altering the phase angle by a step width in a first direction if the measured quadrature phase component is positive and altering the phase angle by a step width in an opposite direction if the measured quadrature phase component is negative.

17. The method according to claim 16, wherein the step width depends on an amount of the measured quadrature component.

18. The method according to claim 12, wherein the determining of the phase correction value comprises altering the phase angle by a step width in a first direction if the measured quadrature phase component is positive and altering the phase angle by a step width in an opposite direction if the measured quadrature phase component is negative.

19. The method according to claim 18, wherein the step width depends on an amount of the measured quadrature component.

20. The method according to claim 10, wherein the phase angle is not altered if the amount of the measured quadrature phase component is smaller than a predetermined limit value.

21. The method according to claim 11, wherein the phase angle

5

is not altered if the amount of the measured quadrature phase component is smaller than a predetermined limit value.

22. The method according to claim 12, wherein the phase angle is not altered if the amount of the measured quadrature phase component is smaller than a predetermined limit value.

23. The method according to claim 13, wherein the phase angle is not altered if the amount of the measured quadrature phase component is smaller than a predetermined limit value.

24. The method according to claim 10, wherein prior to or concurrent with activating the transmitting device, the phase angle of the phase modifier is preliminarily adjusted such that an output power is measured at a power detector connected downstream of the power amplifier and the phase angle is pre-adjusted such that a minimum of the output power results.

25. The method according to claim 24, wherein the signal of the feedback loop is damped during measurement of the output power.

26. The method according to claim 11, wherein prior to or concurrent with activating the transmitting device, the phase angle of the phase modifier is preliminarily adjusted such that an output power is measured at a power detector connected downstream of the power amplifier and the phase angle is pre-adjusted such that a minimum of the output power results.

27. The method according to claim 12, wherein prior to or concurrent with activating the transmitting device, the phase angle of the phase modifier is preliminarily adjusted such that an output power is measured at a power detector connected downstream of the power

amplifier and the phase angle is pre-adjusted such that a minimum of the output power results.

28. The method according to claim 13, wherein prior to or concurrent with activating the transmitting device, the phase angle of the phase modifier is preliminarily adjusted such that an output power is measured at a power detector connected downstream of the power amplifier and the phase angle is pre-adjusted such that a minimum of the output power results. --

IN THE ABSTRACT:

Please append the attached Abstract to the application.

## REMARKS

By this Amendment, the specification is amended, an abstract is added, claims 1-9 are cancelled and claims 10-28 are added. Claims 10-28 are pending.

This Amendment is submitted to better conform the application to United States practice by, *inter alia*, eliminating multiple dependencies from the claims and adding section headings to the specification.

Attached hereto is a paper, captioned "Amendment Appendix" showing the marked-up version of the changes made by this Amendment to the paragraph rewritten at page 1.
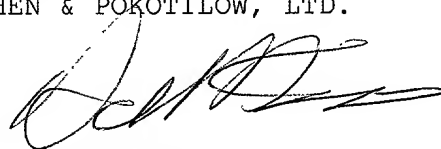
It is respectfully submitted that the application is in good form for initial examination on the merits. Accordingly, prompt and favorable examination on the merits is respectfully requested.

Should the Examiner believe that anything further is desirable in order to place the application in even better condition for initial examination and allowance, the Examiner is invited to contact Applicant's undersigned attorney at the telephone number listed below.

Respectfully submitted,

CAESAR, RIVISE, BERNSTEIN,
COHEN & POKOTILOW, LTD.

March 8, 2002                    By

David M. Tener
Reg. No. 37,054
Customer No. 03000
(215) 567-2010
Attorneys for Applicant

Please charge or credit
our Account No. 03-0075
as necessary to effect
entry and/or ensure
consideration of this
submission.

**AMENDMENT APPENDIX**
**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

IN THE SPECIFICATION:

The paragraph at page 1, lines 10-31, is amended as follows:
-- [A method according to the preamble of claim 1 emerges, for example, from ]EP 0 706 259 A1[. In the] discloses a transmitting device [emerging from this publication] wherein a basic band input signal is supplied to a quadrature modulator via two differential amplifiers. Said quadrature modulator performs quadrature modulation of the inphase component and the quadrature phase component of the complex input signal. Power amplification takes place in a power amplifier connected downstream the quadrature modulator. To compensate the non-linerarity of this power amplifier a feedback loop is provided, generally designated as a Cartesian feedback. In this feedback loop is located a quadrature demodulator which separates the fedback signal into a fedback inphase component and a fedback quadrature phase component. The fedback inphase component is supplied, together with the inphase component of the input signal, to a first differential amplifier, connected upstream the quadrature modulator. Correspondingly, the fedback quadrature phase component is supplied, together with the quadrature phase component of the input signal, to a second differential amplifier. In this way the non-linearities of the power amplifier are compensated via the fedback signal. --.

## ABSTRACT OF THE DISCLOSURE

A method for adjusting a phase angle (φ) of a phase modifier (25) of a transmitting device which includes a quadrature modulator (3), a power amplifier (9), a quadrature demodulator (19) and differential amplifiers (26, 27). The power amplifier (9) is linearized via the feedback loop (16) according to the Cartesian feedback method. The phase modifier (25) supplies an oscillator signal to the quadrature demodulator (19), which signal is shifted by the phase angle (φ) to be adjusted with regard to the oscillator signal that is supplied to the quadrature modulator (3). An input signal with a constant inphase component (I) and a constant quadrature phase component (Q) is applied during each transmission burst in the instance of a closed feedback loop, and the quadrature component (VQM) and/or the inphase component (VIM) is measured at a measuring point (53, 61) located behind the output of the differential amplifiers (26, 27).

## Method for adjusting a phase angle of a phase modifier of a transmitting device

The invention relates to a method for adjusting a phase
5    angle of a phase modifier of a transmitting device. The
transmitting device comprises a quadrature modulator and a
power amplifier which is linearized via a so-called
Cartesian feedback loop with a quadrature demodulator.

10   A method according to the preamble of claim 1 emerges, for
example, from EP 0 706 259 A1. In the transmitting device
emerging from this publication a basic band input signal is
supplied to a quadrature modulator via two differential
amplifiers. Said quadrature modulator performs quadrature
15   modulation of the inphase component and the quadrature
phase component of the complex input signal. Power
amplification takes place in a power amplifier connected
downstream the quadrature modulator. To compensate the non-
linearity of this power amplifier a feedback loop is
20   provided, generally designated as a Cartesian feedback. In
this feedback loop is located a quadrature demodulator
which separates the fedback signal into a fedback inphase
component and a fedback quadrature phase component. The
fedback inphase component is supplied, together with the
25   inphase component of the input signal, to a first
differential amplifier, connected upstream the quadrature
modulator. Correspondingly the fedback quadrature phase
component is supplied, together with the quadrature phase
component of the input signal, to a second differential
30   amplifier. In this way the non-linearities of the power
amplifier are compensated via the fedback signal.

In a transmitting device operating according to the
Cartesian feedback method it is particularly important that

the fedback signal is input inphase. In order to achieve this, the signal of a local oscillator, which is required for the quadrature modulation and quadrature demodulation, is supplied to the quadrature demodulator at a phase angle
5   shifted with regard to the quadrature modulator. The phase shift takes place in a phase modifier, the phase angle of which has to be adjusted. To adjust the phase angle, in EP 0 706 259 A1 a test mode is proposed, in which the feedback loop is interrupted at the output of the quadrature
10   demodulator. A test signal is applied to the input of the quadrature modulator and the output signal of the quadrature demodulator is measured. With a predetermined input signal the phase angle to be set can be calculated from the real part and the imaginary part of the output
15   signal of the quadrature demodulator.

Of disadvantage in the mode of operation proposed in EP 0 706 259 A1, however, is that the feedback loop for determining the phase angle has to be opened each time.
20   This method may be suitable for adjusting the phase angle once on taking into operation, but in the application of a transmitting device operating on the Cartesian feedback principle in aeronautical radio, in particular with digital aeronautical radio operating according to the VDL standard
25   (VHL digital link) in TDMA Simplex mode, there is a necessity to check and possibly re-adjust the phase angle at each transmitting interval (transmitting burst). This cannot be done with the method emerging from EP 0 706 259 A1, owing to the time-consuming separation of the feedback
30   loop and the complicated measurement process.

Therefore the object of the invention is to cite a method for adjusting a phase angle of a phase modifier of a

transmitting device with a power amplifier which is
linearized according to the Cartesian feedback principle,
which enables correction or re-setting of the phase angle
at each transmitting interval.

5

The object is achieved by the characterising features of
claim 1 in conjunction with the generic features.

The invention is based on the awareness that, by applying
10 an input signal with a predetermined constant inphase
component and a predetermined constant quadrature phase
component, a deviation of the phase angle can be relatively
easily determined. The feedback loop, consisting of
quadrature modulator, power amplifier and quadrature
15 demodulator and the differential amplifiers, can therein
remain closed. The method can be carried out at each
transmitting interval, as it is not time-consuming and does
not require separation of the feedback loop.

20 Claims 2 to 9 relate to advantageous further developments
of the method according to the invention.

Applying an input signal with predetermined inphase
component (I = const.) and without quadrature phase
25 component (Q = 0) and measuring the quadrature phase
component can advantageously take place at the output of
the differential amplifier at the beginning of every
transmitting interval. During switching over from receive
mode to transmit mode it is in any case advantageous to
30 apply, in addition, for example, to three data symbols, a
reference signal with a pure inphase component without
quadrature phase component at the beginning of the
transmitting interval. This reference signal can be used

for determining the phase according to the invention
without taking extra time. With an input signal without
quadrature phase component (Q = 0) ideally no voltage
occurs at the output of the differential amplifier in the

5    quadrature phase control loop. If a voltage is nevertheless
measured at this measuring point this indicates a phase
error, which can be corrected in the next transmitting
interruption interval or receiving interval.

10   The phase correction value can be immediately determined
from the measured quadrature phase component, optionally
taking into account the additionally measured inphase
component, by an arcus tangens relation. The phase
correction values assigned to the measured values can be

15   tabulated in a memory (look-up table) and read off
immediately without further calculation. An alternative
possibility for determining the optimum phase correction
value consists in a trial and error method, in which the
phase angle is minimally altered experimentally during a

20   receiving interval and in the subsequent transmitting
interval, by measuring the quadrature phase component with
the previously described reference signal, it is
ascertained whether the newly adjusted phase angle yields a
better result. If this is the case, the phase angle is

25   further altered in this direction in the subsequent
receiving interval. If the newly set phase angle yields a
worsening, in the subsequent receiving interval the phase
angle is adjusted back to the previously set value. Due to
this fine alignment, minimal phase fluctuations, resulting,

30   for example, from a drift in temperature, can be re-
corrected while operation is running.

Before the transmitting device is taken into operation for
the first time it is advantageous to perform a preliminary
adjustment of the phase angle in such a way that a minimal
output power results. For this case the maximum self-
5   damping of the system results, by contrast with the reverse
case of maximum output power, resulting in maximum positive
feedback of the system. The signal of the feedback loop is
in this case damped.

10  A simplified embodiment example of the invention is
described in greater detail below with reference to the
drawings.

Fig. 1     shows a block diagram of an embodiment example of
15             a transmitting device, suitable for the method
              according to the invention;

Fig. 2     shows a time-dependency diagram to explain the
              method according to the invention;

20

Fig. 3     shows a flow diagram to explain an embodiment
              example of the method according to the invention
              and

25  Fig. 4     shows a diagram to explain the measuring of the
              phase correction angle.

Fig. 1 shows a transmitting device 1 suitable for carrying
out the method according to the invention in a basic block
30  diagram.

A digital signal processor (DSP) 2 generates a complex
input signal for a quadrature modulator 3, consisting of an

inphase mixer 4, a quadrature phase mixer 5 and a summer 6, as well as a phase modifier 7. The complex input signal consists of an inphase component I and a quadrature phase component Q, wherein the inphase component I is supplied to

5    the inphase mixer 4 and the quadrature phase component Q is supplied to the quadrature phase mixer 5. The output signal of a local oscillator 8 is supplied to the phase modifier 7, wherein the phase modifier 7 supplies this oscillator signal to the inphase mixer 4 without phase shift and to

10   the quadrature phase mixer 5 at a phase shift of 90°.

Connected downstream the quadrature modulator 3 is a power amplifier 9 which supplies the quadrature-modulated signal, power-amplified corresponding to the transmitting power of

15   the transmitting device 1, to an antenna 13 via a circulator 10, a power detector 11 and a transmit-receive changeover switch 12. In the embodiment example illustrated in Fig. 1 the digital signal processor 2 acts simultaneously as control unit for the transmit-receive

20   changeover and triggers the transmit-receive changeover switch 12 in such a way that the antenna 13 is connected to the power amplifier 9 in transmit mode and to a receiver designated as an RX in receive mode. The circulator 10, connected to the terminal resistance 14, serves to avoid

25   feedback of possibly reflected transmitting power into the power amplifier 9.

In the signal path between the power amplifier 9 and the antenna 13 is a decoupler 15, which couples the output

30   signal of the power amplifier 9 into a feedback loop 16. In the feedback loop 16 is a changeover switch 17, via which an input 18 of a quadrature demodulator 19 can be optionally connected to the decoupler 15 or a terminal

resistance 20. Between the decoupler 15 and the changeover switch 17 is a logarithmic power detector 39. The quadrature demodulator 19 consists of a signal divider 21, which divides the input signal equally between an inphase

5 mixer 22 and a quadrature phase mixer 23. Further provided is a phase modifier 24, to which the output signal of the local oscillator 8 is supplied via an adjustable phase modifier 25. Phase modifier 24 operates like phase modifier 7 and supplies to the inphase mixer 22 a non-phase-shifted

10 oscillator signal and to the quadrature phase mixer 23 an oscillator signal phase-shifted by 90°, wherein the oscillator signal has previously been phase-shifted in total by a phase angle φ by the phase modifier 25.

15 At the output of the inphase mixer 22 is a fedback inphase component I' and at the output of the quadrature phase mixer 23 is a fedback quadrature phase component Q'. The inphase component I of the input signal is passed to the (+) input of a first differential amplifier 26, while the

20 fedback inphase component I' is passed to the (−) input of the first differential amplifier 26. Correspondingly the quadrature phase component Q of the input signal is supplied to the (+) input of a second differential amplifier 27, while the fedback quadrature phase component

25 Q' is supplied to the (−) input of the second differential amplifier 27. By means of this feedback arrangement, generally designated as Cartesian feedback, it is achieved that linearization errors of the power amplifier 9 are compensated by the quadrature demodulator 19, arranged in

30 the feedback loop 16, and the differential amplifiers 26 and 27. It should therein be ensured, however, that the fedback signal I', Q' is supplied to the differential amplifiers 26 and 27 with a phase shift of 0° with regard

to the input signal I, Q. The correct phase position is set
by the adjustable phase modifier 25, the phase angle $\varphi$ of
which can be altered with the method according to the
invention by the digital signal processor via a control

5 signal.

As both the quadrature modulator 3 and the quadrature
demodulator 19 have a direct current offset (DC offset),
this direct current offset has to be correspondingly

10 compensated. A third differential amplifier 28, arranged
between the inphase mixer 22 of the quadrature demodulator
19 and the first amplifier 26, serves this purpose. A
fourth differential amplifier 29 is arranged between the
quadrature phase mixer 23 of the quadrature demodulator 19

15 and the second differential amplifier 27. While the fedback
inphase component I' is supplied to the (+) input of the
third differential amplifier 28, a first compensation
voltage $V_{I1}$ is supplied to the (-) input of the third
differential amplifier 28, so the direct current offset in

20 the I' component of the quadrature demodulator 19 is
compensated at the output of the third differential
amplifier 28. Correspondingly the fedback quadrature phase
component Q' is supplied to the fourth differential
amplifier 29 at its (+) input, while a fourth compensation

25 voltage $V_{Q1}$ is supplied to its (-) input.

A fifth differential amplifier 30, to the (+) input of
which the output of the first differential amplifier 26 is
supplied, while a third compensation voltage $V_{I2}$ is supplied

30 to its (-) input, serves to compensate the direct current
offset of the quadrature modulator 3. Further provided is a
sixth differential amplifier 31, the output of which is
connected to the quadrature phase mixer 5 of the quadrature

modulator 3 and to the (+) input of which the output of the
second differential amplifier 27 is supplied. A fourth
compensation voltage $V_{Q2}$ is supplied to the (-) input of the
sixth differential amplifier 31. The compensation voltages

5   $V_{I1}$, $V_{Q1}$, $V_{I2}$, and $V_{Q2}$ are drawn in as controllable voltage
sources in Fig. 1 for better illustration, however these
compensation voltages are expediently generated internally
in the digital signal processor 2.

10  With fast changeover between transmit mode and receive mode
there is a problem, where a feedback loop 16 according to
the Cartesian feedback principle is used, that the high
frequency signal path of the loop, consisting of the
quadrature modulator 3, the power amplifier 9, the

15  quadrature demodulator 19 and the differential amplifiers
26 and 27, has to be interrupted during the changeover from
transmit mode to receive mode, as the power amplifier 9 and
the local oscillator 8 have to be switched off. When the
power amplifier 9 and the local oscillator 8 are switched

20  on again and the high frequency signal path is restored via
the feedback loop 16, a switching shock pulse is caused, as
the voltages of the control system, in other words the
output voltages of the two differential amplifiers 26, 27,
run to the positive or negative control limit stop when the

25  high frequency signal path is open. This leads to an
unacceptable sudden power variation to the maximum possible
transmitting power of the power amplifier 9. Therefore in
Fig. 1, as well as the high frequency signal path from the
output of the differential amplifiers 26 and 27 via the

30  quadrature modulator 3, the power amplifier 9 and the
quadrature demodulator 19 to the (-) input of the
differential amplifiers 26 and 27, two direct DC signal
paths 32 and 33 are to be provided, which directly connect

the output of the differential amplifier 26 or 27, assigned in each case, to the (-) input of the respective differential amplifier 26 or 27. The direct DC signal paths 32 and 33 consist in the embodiment example illustrated in

5  each case of a controllable switch 34 or 35, which can be constructed, for example, as field-effect transistors, and a resistance 36 or 37, connected in series. During receive mode a constant 0V potential can be maintained at the input and output of the differential amplifier 26 and 27, so the

10  changeover to transmit mode takes place without shock pulses. The function of the low impedance resistances 51 and 52, arranged parallel to the resistances 36 and 37 and able to be connected to the switches 34 and 35 via a separate switch position, is explained in more detail

15  later.

Fig. 2 shows in a time-dependency diagram the sequence of the changeover from receive mode to transmit mode. In the top partial diagram the output power TX is represented

20  logarithmically as a function of the time. Further illustrated in Fig. 2 and designated as RX is the signal of the latest possible receiving interval. In the partial diagram below it the input signal I/Q is represented as a function of the time. Below this is the signal "S/E" for

25  actuating the transmit/receive changeover switch 12 and the signal "DC loop" for actuating switches 34 and 35 in each case as a function of the time t. The signal "BIAS" designates the supply voltage for the power amplifier 9, while the signal "LO level" designates the level of the

30  local oscillator 8.

As can be seen from Fig. 2, during the changeover from receive mode to transmit mode the procedure is as follows:

First the level of the local oscillator 8 is increased.
Then the supply voltage (BIAS) for the power amplifier 9 is
switched on and the switch 17 subsequently actuated, so the
input of the quadrature demodulator 19 is switched over to
the decoupler 15. After the high frequency feedback loop
has thus been closed, switches 34 and 35 are opened by the
signal "DC loop" and the direct current paths 32 and 33 are
thus interrupted. Finally, by means of the signal "S/E" the
transmit/receive changeover switch 12 is switched over to
transmit mode. Subsequently the input signal I/Q can be
supplied to the quadrature modulator 3 via the (+) inputs
of the differential amplifiers 26 and 27 and the output
power TX thus successively increased (ramping).

In the time interval between times $t_1$ and $t_2$ an almost
constant output signal is available. In the embodiment
example an input signal I/Q is used as reference signal
between times $t_1$ and $t_2$, consisting of a constant inphase
component ($I.$ = const.) without quadrature phase component
($Q = 0$). This signal is applied as reference signal at the
beginning of every transmitting interval before transfer of
the actual data for a period of preferably three data
symbols in the time interval between times $t_1$ and $t_2$.
Simultaneously at least the quadrature phase component $V_{QM}$
is measured at measuring point 53 in Fig. 1. Preferably the
inphase component $V_{IM}$ is also measured at measuring
point 61. Since a pure inphase component without quadrature
phase component is used as input signal, ideally, i.e. with
correctly chosen phase angle $\varphi$ for the phase modifier 25,
the measuring signal $V_{QM}$ at measuring point 53 is zero. If a
deviating measuring voltage occurs this indicates a phase
error which is to be corrected.

The method according to the invention for adjusting the phase angle $\varphi$ is explained using Fig. 3. The method is divided into pre-adjusting of the phase angle $\varphi$, to be

5 performed once when the transmitting device 1 is taken into operation (method steps 40), re-setting the phase angle $\varphi$ at each transmitting interval (transmitting burst) (method steps 41) and optional fine re-setting of the phase angle $\varphi$ at each transmitting interval (method steps 42).

10

When the transmitting device 1 is taken into operation the phase angle $\varphi$ of the phase modifier 25 in the embodiment example illustrated in Fig. 3 is pre-adjusted in such a way that the power P is measured as a function of the phase

15 angle $\varphi$ by the logarithmic power detector 39 or by the power detector 11. The phase angle $\varphi$ is therein continually varied in the range of 0° to 360°. Finally, the particular phase angle $\varphi$ in which the measurement resulted in the minimum power $P_{min}$ is set. This measuring principle is based

20 on the assumption that for the phase angle $\varphi$ for which the minimum output power $P_{min}$ results the feedback loop 16 is optimally negatively fed back. The thus pre-adjusted phase angle $\varphi$ usually offers a good starting point for the adjustment method to be described below, which is performed

25 at each transmitting interval. During this measurement of the output power the signal of the feedback loop 16 is damped, in order to avoid too great a positive feedback with a rough misadjustment of the phase angle $\varphi$, with the danger of destroying the power amplifier 9. In the

30 embodiment example this damping is achieved in that switches 35 and 35 are switched over to the low impedance resistances 51 and 52, in order to achieve strong negative feedback of the differential amplifiers 26 and 27.

Alternatively series resistances, for example, could also be connected in the feedback loop 16.

With the adjustment method according to the invention, as

5   described, at the beginning of every transmitting interval
or transmitting burst a reference signal with a pure
inphase component (I = const.) without quadrature phase
component (Q = 0) is applied for a period of preferably
three data symbols and at least the quadrature phase

10  component (measuring signal $V_{QM}$) is measured at the output
of the second differential amplifier 27 at measuring
point 53. As the inphase component I is constant, it is
sufficient to relate the measured quadrature phase
component $V_{QM}$ to the input inphase component I and to use

15  them as an argument for the arcus tangens function, in
order to obtain the phase correction value $\Delta\varphi$. Accuracy of
measurement can be increased in that the measured
quadrature phase component $V_{QM}$ is related not to the
predetermined inphase component I at the input of the first

20  differential amplifier 26, but to the inphase component $V_{IM}$
measured at the output of the first differential amplifier
26. The corrected phase angle $\varphi'$ results from addition of
the phase correction angle $\Delta\varphi$ to the previously adjusted
phase angle $\varphi$. The phase correction value $\Delta\varphi$ can be read

25  off in a stored table as a function of the measured signal
$V_{QM}$ or $V_{QM}$ and $V_{IM}$.

In the variant of the adjustment method described in Fig. 3
re-setting the phase angle $\varphi$ takes place by means of the

30  arcus tangens function only until the obtained phase
correction value $\Delta\varphi$ is greater than a predetermined
constant c. If the phase correction value $\Delta\varphi$ is smaller
than the limit value c, a change is made to an iterative

fine adjustment method 42. This fine adjustment method 42 is based on a trial and error principle. Before each transmitting burst the currently set phase angle $\varphi$ is altered experimentally by a step width $\Delta\varphi_{step}$ and then at the beginning of the transmitting burst the measuring voltage $V_{QM}$ is measured at measuring point 53, while at the input a pure inphase component I without quadrature phase component applies. With a properly adjusted phase angle $\varphi$ the measuring voltage $V_{QM}$ is ideally 0. If the amount $|V_{QM}|$ of the measuring voltage $V_{QM}$ is reduced by the variation of the adjusted phase angle $\varphi$, this newly adjusted phase angle $\varphi'$ is better than the previously adjusted phase angle $\varphi$. The phase angle $\varphi$ is optionally altered again in this direction for the next transmitting burst, in order to test whether the amount of the measuring voltage $V_{QM}$ therein decreases even further. The step width can optionally be varied as a function of the amount of the measuring voltage $V_{QM}$. If the amount of the measuring voltage $V_{QM}$ is greater, however, the setting is put back to the previously set phase angle $\varphi$.

This method is then repeated in the opposite direction with reversed algebraic sign of $\Delta\varphi_{step}$. If fine adjustment in the opposite direction also does not result in an improvement, the previously set phase angle $\varphi$ is the best value and is left for a predetermined period. After a period after which, for example, owing to a thermal drift, a shift in the phase angle $\varphi$ may have resulted, the method described above is repeated.

Fig. 4 shows the predetermined constant input signal (I, Q), consisting of the inphase component I and the quadrature phase component Q, and the measuring signal

$(V_{IM}, V_{QM})$ measured at the output of the differential amplifiers 26 and 27, consisting of the measured inphase component $V_{IM}$ and the measured quadrature phase component $V_{QM}$.

5

The predetermined desired phase angle $\varphi_{soll}$ results therein from the relation

$$\varphi_{soll} = \text{arc tan } \frac{Q}{I}$$

10

The measured actual phase angle $\varphi_{ist}$ results from the relation

15

$$\varphi_{ist} = \text{arc tan } \frac{V_{QM}}{V_{IM}}.$$

The phase correction value $\Delta\varphi$ results from the relation

20

$$\Delta\varphi = \varphi_{ist} - \varphi_{soll} =$$

$$= \text{arc tan } - \frac{V_{QM}}{V_{IM}} - \text{arc tan } \frac{Q}{I}.$$

25 In the embodiment example described using Fig. 3 an input signal with a pure inphase component has been used, wherein the input quadrature phase component Q is zero, so $\varphi_{soll} = 0$. As the preceding relation shows, other input signals with other desired phase angles can also be used, however,

30 wherein the use of the desired phase angle $\varphi_{soll} = 0$ is preferred owing to the resulting simplification of the measuring process.

The invention is not restricted to the embodiment example illustrated. In particular other algorithms than those illustrated in Fig. 3 can be used. The preliminary adjustment of the phase angle $\varphi$ illustrated in Fig. 3 can

5   also be done in other ways. Instead of an input signal with a pure inphase component any chosen input signal with constant phase angle $\varphi$ can be used.

**Patent claims**

1.   Method for adjusting a phase angle ($\varphi$) of a phase
modifier (25) of a transmitting device (1),

5   wherein the transmitting device (1) has

a quadrature modulator (3) for quadrature modulation of an
inphase component (I) and a quadrature phase component (Q)
of a complex input signal (I, Q),

a power amplifier (9), connected downstream the quadrature

10   modulator (3),

a quadrature demodulator (19) for quadrature demodulation
of the output signal of the power amplifier (9) into a
fedback inphase component (I′) and a fedback quadrature
phase component (Q′),

15   a first differential amplifier (26), connected upstream the
quadrature modulator (3), to the first input of which the
inphase component (I) of the input signal and to the second
input of which the fedback inphase component (I′) are
supplied,

20   a second differential amplifier (27), connected upstream
the quadrature modulator (3), to the first input of which
the quadrature phase component (Q) of the input signal and
to the second input of which the fedback quadrature phase
component (Q′) are supplied and

25   a phase modifier (25), which supplies to the quadrature
demodulator (19) an oscillator signal, shifted with regard
to an oscillator signal supplied to the quadrature
modulator (3) by the phase angle ($\varphi$) to be adjusted,
characterised by

30   the following method steps:

- applying an input signal with a predetermined
  constant inphase component (I) and a predetermined
  constant quadrature phase component (Q) at each

transmitting interval with closed feedback loop (16)
consisting of quadrature modulator (3), power
amplifier (9), quadrature demodulator (19) and first
and second differential amplifier (26, 27),

5    -    measuring the quadrature phase component ($V_{QM}$)
and/or the inphase component ($I_{QM}$) at a measuring
point (53; 61) behind the output of the differential
amplifiers (26, 27),

-    determining a phase correction value ($\Delta\varphi$) on the

10    basis of the measured quadrature phase component
($V_{QM}$) and/or the measured inphase component ($V_{IQ}$) and

-    correcting the currently set phase angle ($\varphi$) of the
phase modifier (25) by adding or subtracting the
determined phase correction value ($\Delta\varphi$) in a

15    transmitting interruption interval.

2.    Method according to claim 1,
characterised in that applying an input signal with a
predetermined inphase component (I) without a quadrature

20    phase component (Q=0) and measuring the quadrature phase
component ($V_{QM}$) at measuring point (53) behind the output of
the second differential amplifier (27) takes place at the
beginning of every transmitting interval.

25    3.    Method according to claim 2,
characterised in that additionally the inphase component
($V_{IM}$) is measured at measuring point (61) behind the output
of the first differential amplifier (26).

30    4.    Method according to one of claims 1 to 3,
characterised in that determining the phase correction
value ($\Delta\varphi$) is done according to the following calculation:

$$\Delta\varphi = \text{arc tan } \underline{V_{QM}} - \text{arc tan } \underline{Q}$$
$$V_{IM} \qquad\qquad I$$

wherein $V_{QM}$ is the measured quadrature phase component,

$V_{IM}$ the measured inphase component,

5    Q the predetermined quadrature phase component and

I the predetermined inphase component.


5.    Method according to claim 2 or 3,

characterised in that determining the phase correction

10   value ($\Delta\varphi$) is done in such a way that

the phase angle ($\varphi$) is altered by a step width in a first

direction if the measured quadrature phase component ($V_{QM}$)

is positive and

the phase angle ($\varphi$) is altered by a step width in the

15   opposite direction if the measured quadrature phase

component ($V_{QM}$) is negative.


6.    Method according to claim 5,

characterised in that the step width depends on the amount

20   of the measured quadrature component ($V_{QM}$).


7.    Method according to one of claims 1 to 6,

characterised in that the phase angle ($\varphi$) is not altered if

the amount of the measured quadrature phase component ($V_{QM}$)

25   is smaller than a predetermined limit value (c).


8.    Method according to one of claims 1 to 7,

characterised in that before or when the transmitting

device is taken into operation preliminary adjustment of

30   the phase angle ($\varphi$) of the phase modifier (25) takes place

in such a way that the output power (P) is measured at a

power detector (10; 39) connected downstream the power

amplifier (9) and the phase angle ($\varphi$) is pre-adjusted in

such a way that a minimum ($P_{min}$) of the output power (P) results.

9.  Method according to claim 8, characterised in that the signal of the feedback loop (16) is damped during measurement of the output power (P).

**(54) Title: METHOD FOR ADJUSTING A PHASE ANGLE OF A PHASE MODIFIER OF A TRANSMITTING DEVICE**

**(54) Bezeichnung: VERFAHREN ZUM EINSTELLEN EINES PHASENWINKELS EINES PHASENSCHIEBERS EINER SENDEEINRICHTUNG**
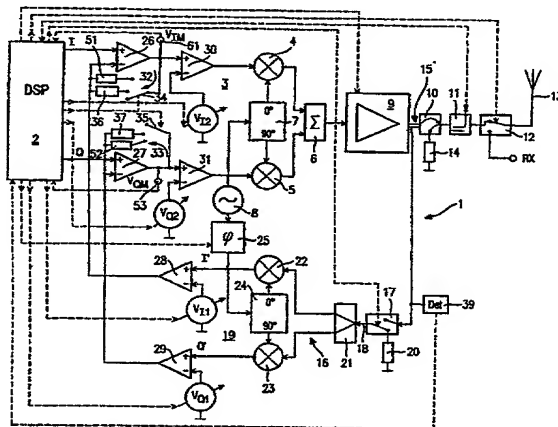
**(57) Abstract:** The invention relates to a method for adjusting a phase angle (φ) of a phase modifier (25) of a transmitting device which comprises a quadrature modulator (3), a power amplifier (9), a quadrature demodulator (19) and differential amplifiers (26, 27). The power amplifier (9) is linearized via the feedback loop (16) according to the Cartesian feedback method. The phase modifier (25) supplies an oscillator signal to the quadrature demodulator (19). Said oscillator signal is shifted by the phase angle (φ) to be adjusted with regard to the oscillator signal that is supplied to the quadrature modulator (3). According to the invention, an input signal with a constant inphase component (I) and a constant quadrature phase component (Q) is applied during each transmission burst in the instance of a closed feedback loop, and the quadrature component (V_QM) and/or the inphase component (V_IM) is measured at a measuring point (53, 61) located behind the output of the differential amplifiers (26, 27).

**(57) Zusammenfassung:** Die Erfindung betrifft ein Verfahren zum Einstellen eines Phasenwinkels (φ) eines Phasenschiebers (25) einer Sendeeinrichtung, die einen Quadraturmodulator (3), einen Leistungsverstärker (9), einen Quadraturdemodulator (19) und Differenzverstärker (26, 27) umfasst. Der Leistungsverstärker (9) ist nach der Methode der kartesischen Rückkopplung über die
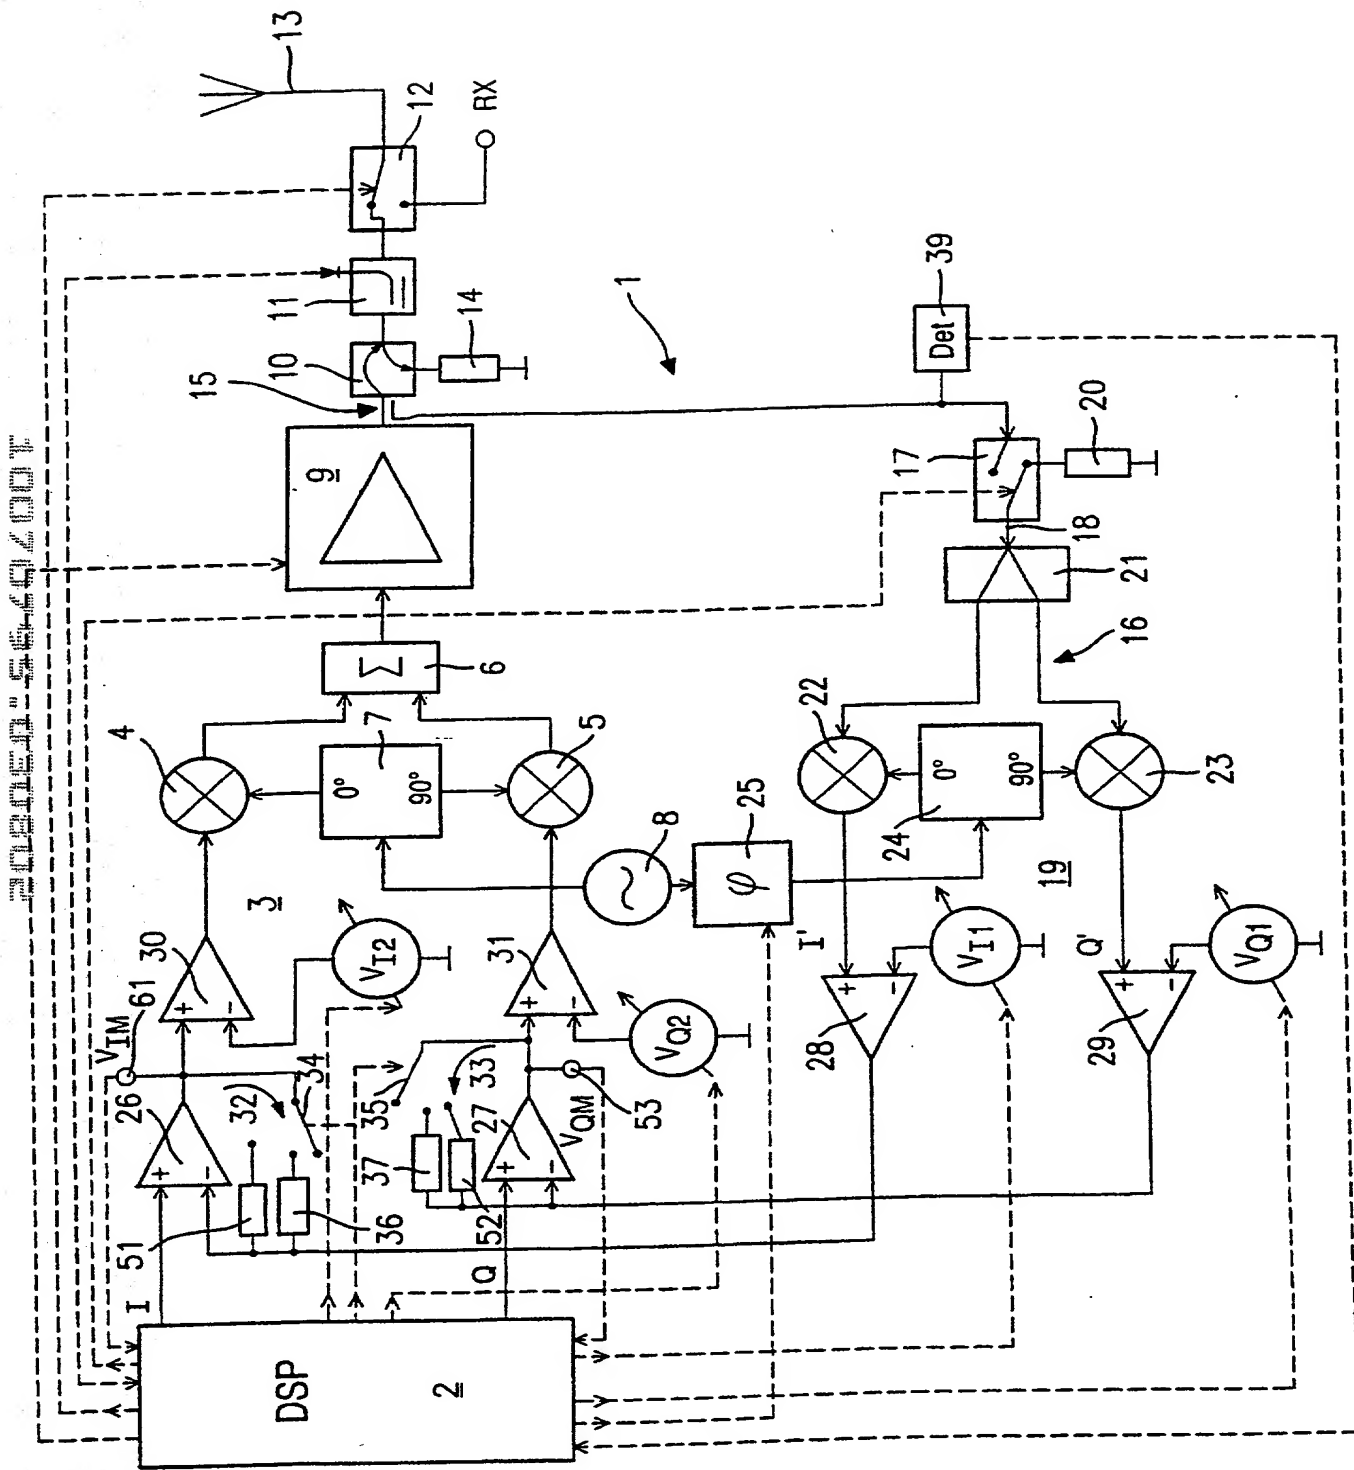
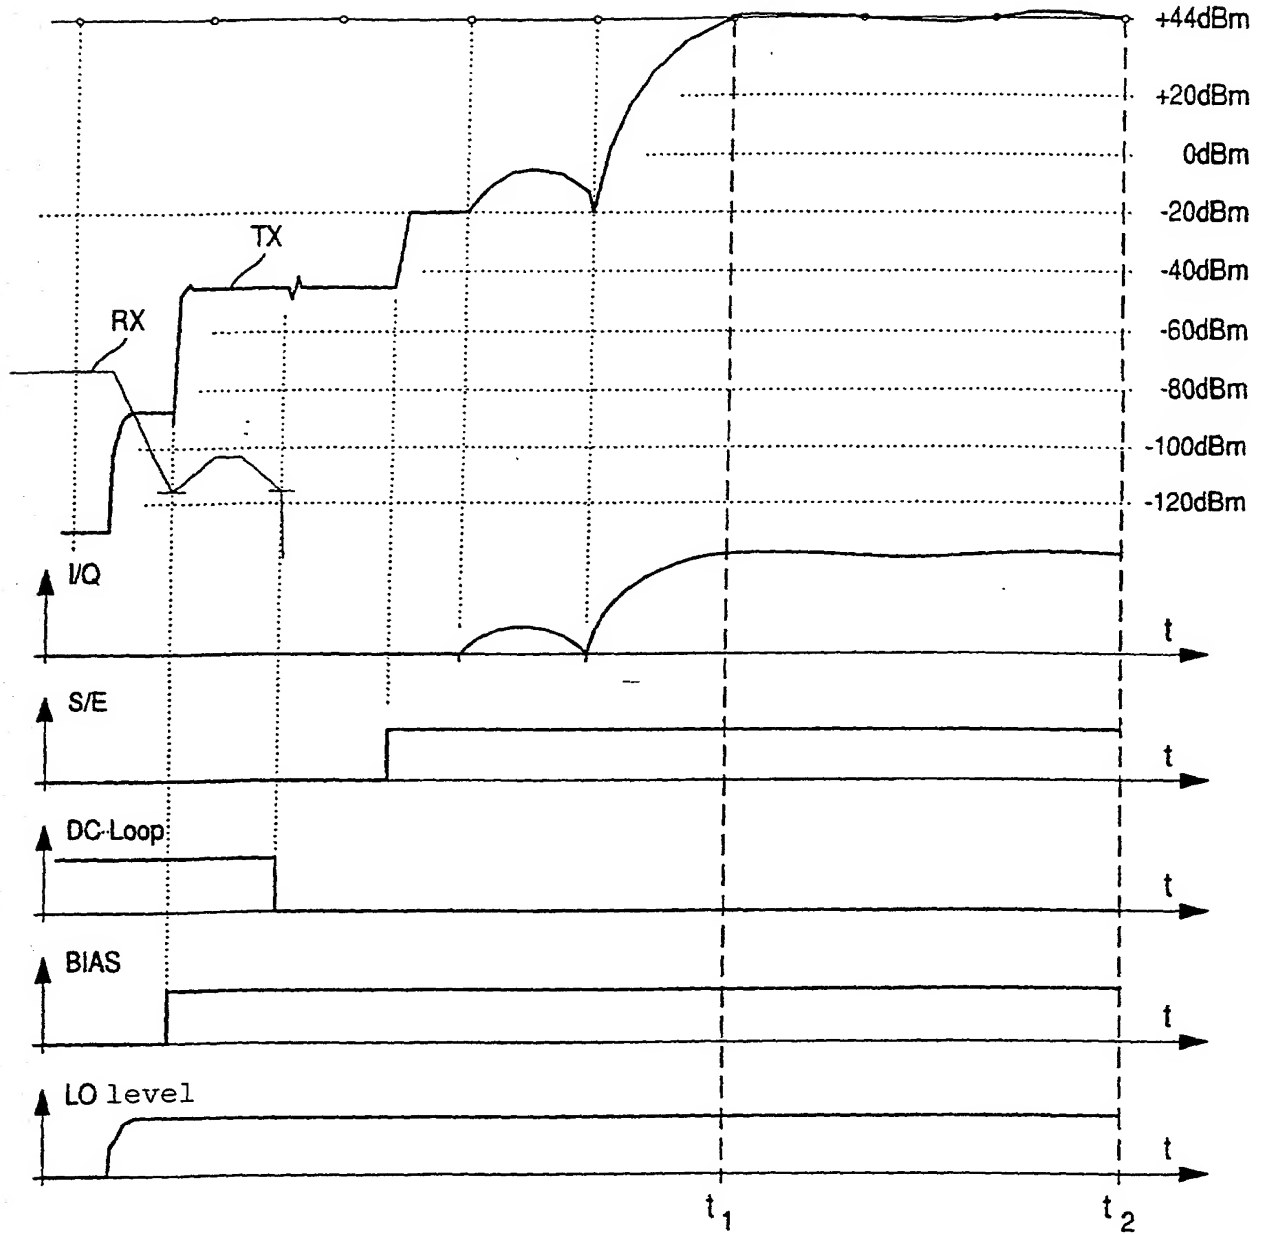*[Fortsetzung auf der nächsten Seite]*

WO 01/24467 A3

Fig. 1

Fig. 2

Fig. 3

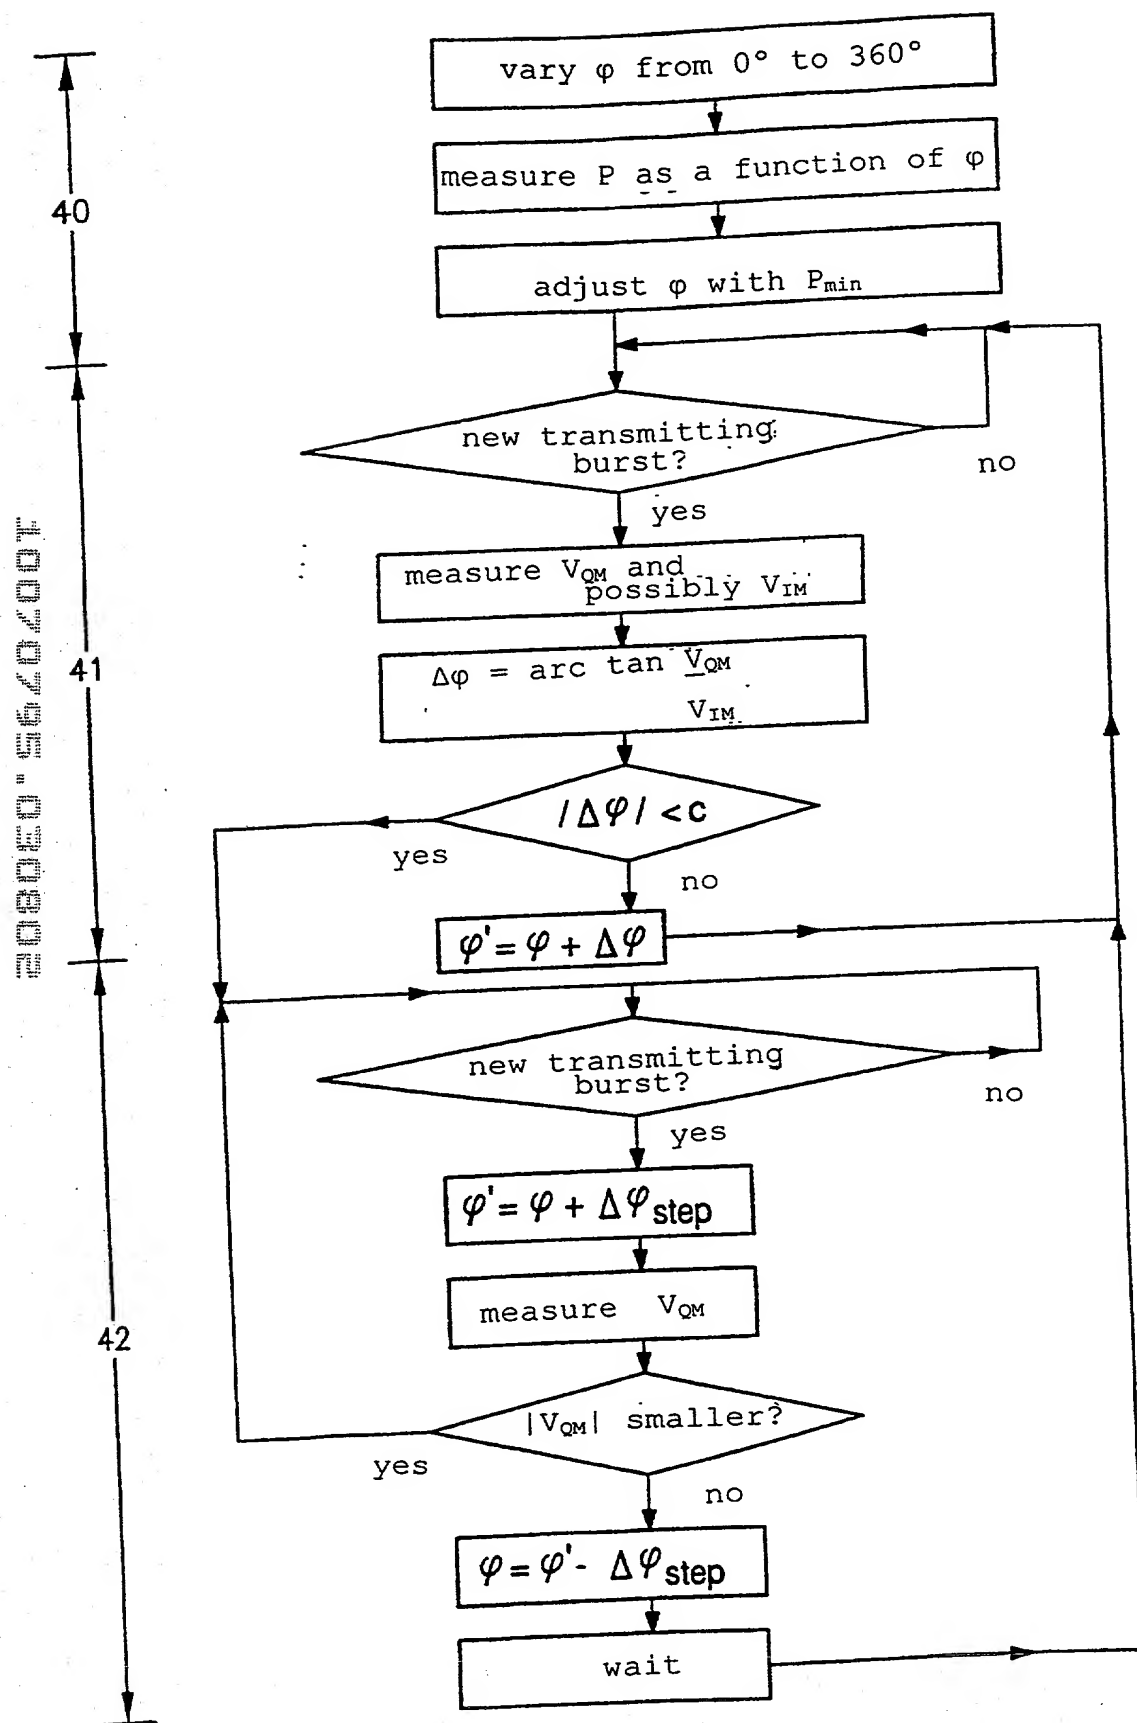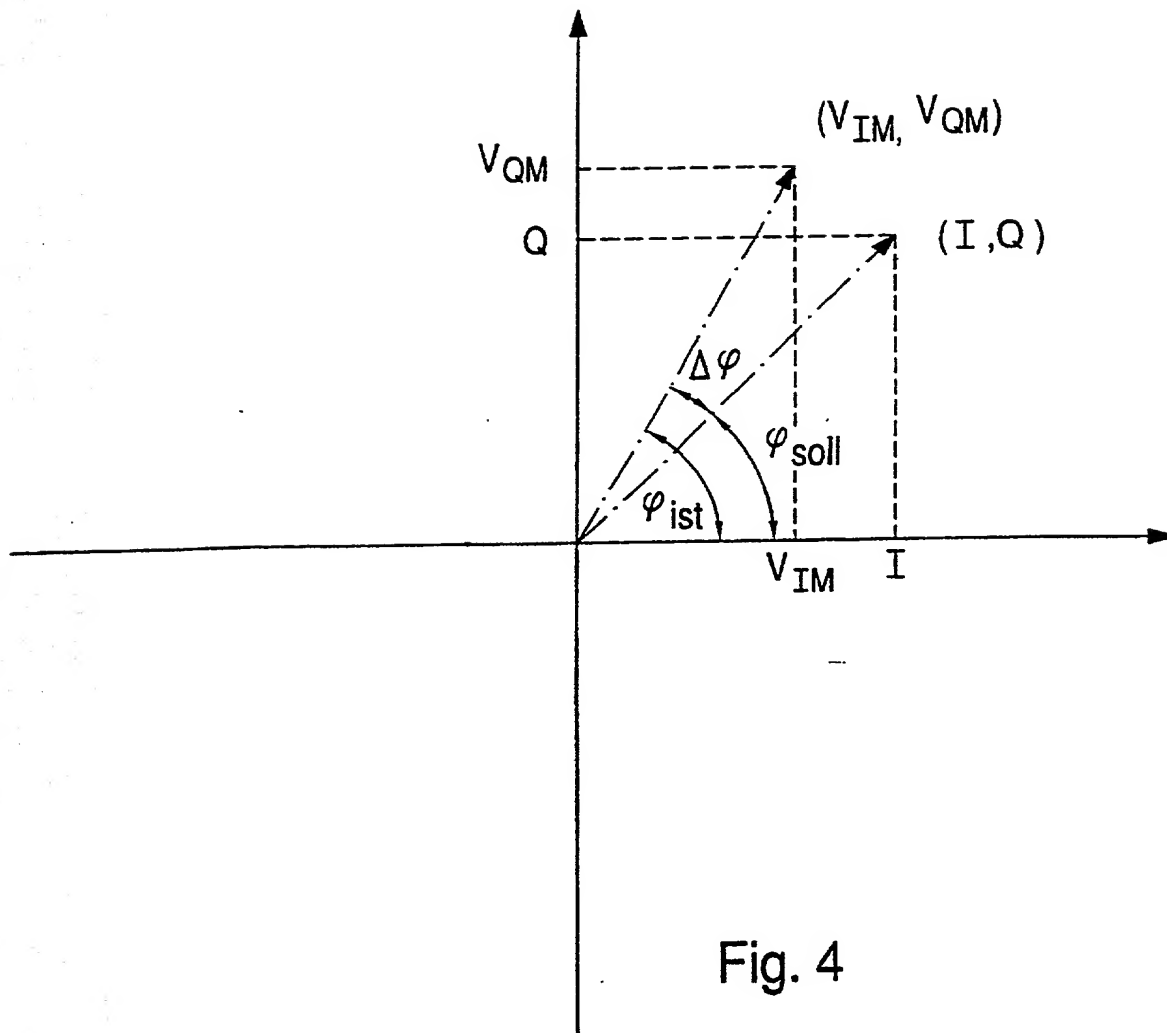Fig. 4

P22870/US

Attorney Docket No. __M1211/20001__

## DECLARATION (37 CFR 1.63) AND POWER OF ATTORNEY FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

**Title of Invention:**

As the below named inventor(s), I/we declare that:

This declaration is directed to:

☒      The attached application, or

☐      Application No._____, filed on _____ ,
        as amended on _____ (if applicable);

I/we believe that I/we am/are the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought;

I/ we have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above;

I/we acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me/us to be material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT International filing date of the continuation-in-part application.

All statements made herein of my/own knowledge are true, all statements made herein on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint the practitioners at Customer No. 03000 as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith. Please change the correspondence address for the above-identified application to Customer No. 03000.

03000
PATENT TRADEMARK OFFICE

### FULL NAME OF INVENTOR(S)

| | |
|---|---|
| Inventor one:    Friedrich Lipp | Citizen of:   Austria |
| Signature: | Date:   28.2.2002 |
| Inventor two: | Citizen of: |
| Signature: | Date: |
| Inventor three: | Citizen of: |
| Signature: | Date: |
| Inventor four: | Citizen of: |
| Signature: | Date: |

☐      Additional inventors are being named on _____ additional form(s) attached hereto.